


GuideLed 10025, 10026 CG-S

Exit Sign Panel Luminaires




GuideLed 10025, 10026 CG-S

- Exit sign panel luminaire in LED technology for ceiling installation
- Slender design with pictogram width of only 12 mm
- Very good perceptibility due to of high luminance of the white contrasting colour > 500 cd/m² in keeping with standard ISO 3864-1 and high uniformity $L_{\min}/L_{\max} > 0.8$
- Reduced battery costs due to of especially low power consumption
- Low operating costs due to of low effective power of 2.9 W only (1.9 W one-sided)
- Minimum service requirement due to high service life of the LEDs (up to 50,000 hours)

GuideLed 10025 CG-S



Dimensions in mm

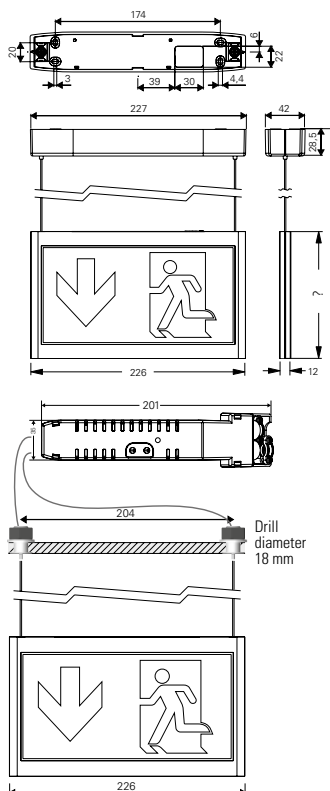

GuideLed 10026 CG-S

Viewing distance	20 m
Luminous flux Φ_E/Φ_N at the end of rated operating time	100 %
Housing material	PC, PMMA
Housing colour	Light grey RAL 7035
Weight	0.40 kg (10025 LED CG-S) 0.52 kg (10026 LED CG-S)
Type of mounting	Suspended installation (max. 1.5 m)
Connection terminal	Clamp terminal 2.5 mm ²
Connection voltage	220 – 240 V AC, 50/60 Hz 176 – 275 V DC
Current consumption - battery operation (220 V)	one-sided 8 mA – two-sided 12 mA
Power consumption mains operation (apparent power / effective power)	one-sided 4.0 VA / 1.9 W two-sided 5.5 VA / 2.9 W
Inrush current	1.5 A
Permissible ambient temperature	-20 °C to +40 °C
Light source	LED batten

Ordering details - fastening set

LED pictograms must ordered separate

	Order No.
Cable installation set for GuideLed 10025 CG-S with LED supply and CG-S technology (20 addresses) integrated in the canopy	40071353609
Cable installation set for GuideLed 10026/11026 CG-S with ceiling cable holder LED supply and CG-S technology (20 addresses) integrated in a housing with strain relief	40071353640

Ordering details - LED pictograms (fastening set required)

Scope of supply

	Order No.
LED pictogram PL/PR for GuideLed 10025/10026 CG-S (cable installation), ISO 7010, 20 m	40071354510
LED pictogram PU/PU for GuideLed 10025/10026 CG-S (cable installation), ISO 7010, 20 m	40071354511
LED pictogram PL/BL for GuideLed 10025/10026 CG-S (cable installation), ISO 7010, 20 m	40071354512
LED pictogram PR/BL for GuideLed 10025/10026 CG-S (cable installation), ISO 7010, 20 m	40071354513
LED pictogram PU/BL for GuideLed 10025/10026 CG-S (cable installation), ISO 7010, 20 m	40071354514